



FLOORING

Imagine a world with linoleum



A world dictated by aesthetics and style: Colorette kumquat orange

DLW LINOLEUM

DLW LINOLEUM



The World of Linoleum

DLW Linoleum is now more colourful
and diverse than ever

The selection of linoleum structures made in Germany is now markedly broader and more varied. Under the motto "Imagine a world with linoleum", DLW Flooring presents its DLW Linoleum collection just in time for the 150th birthday of the natural floor covering. Nine different patterns in many brilliant colours as well as subtle greys and natural hues can be harmonically combined with one another. A highlight of the collection, especially for architects and Bauhaus fans everywhere, is the Uni Walton. Especially the dark coffee brown tone "Spanish brown" reflects the look of linoleum 150 years ago. Lino Art Star represents a fruity fresh look and shines together with the Colorette palette brilliantly colourful and is full of life.

You are welcome the visit and experience the world of DLW Linoleum on the internet www.imagine-linoleum.com

Imagine a world with linoleum



A world dictated by aesthetics and style: Colorette kumquat orange

Contents

DLW Linoleum - the natural product	04	Linoleum Specials	24
Linoleum - surface protection	05	Colorette AcousticPlus	24
Festival of colours	06	Marmorette AcousticPlus	24
Colorette	08	Marmorette Acoustic	24
Lino Art Star	09	Linodur	25
Marmorette	10	Linodur LCH	25
Metallic Effects	12	Marmorette LCH	25
Lino Art Metallic	14	Technical Data	26
Classic Revival	16	Surface treatments overview	27
Uni Walton	18		
Inspired by nature	20		
Linorette	22		
Granette	22		
Lino Art Nature	23		

DLW LINOLEUM



Linseed Oil



Tree resin



Jute



Sawdust




Cork

DLW Linoleum – the natural product

Linoleum is the only resilient flooring made mainly from renewable raw materials. It is made of 98% organic materials – and is therefore natural and healthy. Linoleum contains neither PVC nor plastisizer. It is warm to the feet and naturally antibacterial due to the linseed oil. Its production based on natural raw materials also give it an almost neutral CO₂ balance.

Linoleum is certified by a number of ecological labels which document its environmental friendliness: Blue Angel, Swan Label, the Austrian environment seal and even the children's toy standard.





Linoleum surface protection: PUR and LPX

Floors in schools, kindergartens or universities have to withstand great stress: Road dirt, stones or sand are common here. Hygiene is the maxim in hospitals and nursing homes. Linoleum can be joined in a closed surface so that no dirt can penetrate and accumulate in the joints. DLW Linoleum offers you two different surface protections for the different applications:

	PUR ECO SYSTEM	LPX FINISH
Initial treatment	not necessary	not necessary*
Removal of scratches	possible	simple
Abrasion resistance / resistance to marking	very good	good
Resistance to chemicals	very good, pH < 12 (Hand disinfectants)	good, pH < 9 (Intensive cleaners)
Particularly suitable areas of application	mainly in hospitals, old people's homes and laboratories	mainly in kindergartens, schools and universities


* If recommendations for cleaning and maintenance are observed

Festival of Colours

Brilliantly colourful and full of life: The new colours of the Colorette are inspired by the Indian Holi Festival, the Festival of Colours. Much more brilliant than previous linoleum colours – and therefore ideal when you want a floor that makes the room shine.





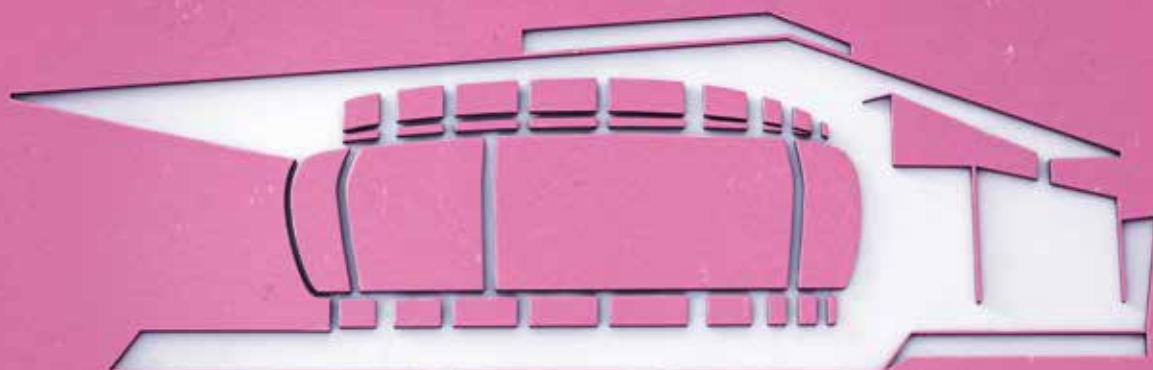


















The new Lino Art Star colours come fruity and fresh: Their chip structure combines a plain coloured background with contrasting, coloured flakes. Two real highlights of the DLW Linoleum collection.

Imagine a world with linoleum



A world full of brilliant colours: Colorette cadillac pink

In the case of Colorette, the name says it all. Because of its strong colours, the structure is especially well-loved in educational settings. With its subtly structured surface, Colorette is a low-maintenance alternative to the monochrome Uni Walton. All products are available with LPX coating.

				 light mud NCS: S 6010-Y10R	 light sand beige NCS: S 1510-Y10R	 lime green NCS: S 0565-G50Y
	131-043 2,5 mm 137-043 2,5 mm		131-140 2,5 mm		131-132 2,5 mm 137-132 2,5 mm	
 oxid grey NCS: S 2500-N	 light beige NCS: S 3005-Y20R	 banana yellow NCS: S 1070-Y	 vivid green NCS: S 3050-G20Y			
131-052 2,5 mm 137-052 2,5 mm	131-012 2,5 mm 137-012 2,5 mm	131-001 2,5 / 3,2 mm 137-001 2,5 mm	131-006 2,5 mm			
 aluminium grey NCS: S 3502-B	 straw beige NCS: S 2030-Y20R	 sunrise orange NCS: S 1070-Y30R	 peppermint green NCS: S 2060-G			
131-058 2,5 mm 137-058 2,5 mm	131-071 2,5 mm	131-171 2,5 mm 137-171 2,5 mm	131-131 2,5 mm			
 stone grey NCS: S 5502-B	 sand yellow NCS: S 2040-Y20R	 kumquat orange NCS: S 2070-Y50R	 poppy blue NCS: S 2060-B			
131-059 2,5 mm 137-059 2,5 mm	131-073 2,5 mm	131-170 2,5 mm 137-170 2,5 mm	131-123 2,5 / 3,2 mm			
 elephant grey NCS: S 6502-B	 african orange NCS: S 1040-Y40R	 power red NCS: S 0580-Y90R	 bluebird NCS: S 3040-R80B			
131-080 2,5 / 3,2 mm 137-080 2,5 mm	131-078 2,5 mm	131-118 2,5 mm 137-118 2,5 mm	131-004 2,5 mm			
 private black NCS: S 8502-B	 deep orange NCS: S 2050-Y60R	 cadillac pink NCS: S 2050-R30B	 melrose violet NCS: S 4040-R60B			
131-081 2,5 / 3,2 mm 137-081 2,5 mm	131-016 2,5 mm	131-110 2,5 mm 137-110 2,5 mm	131-122 2,5 mm			


Lino Art Star

Just glows with joie de vivre and, with its fruity fresh look, is a newcomer to the collection. Contrasting decorative colour flakes are scattered in amongst the predominant colour of the structure's flat chip pattern. In addition to nine deep colour tones ranging from lime green to olympic blue, three progressively darker grey tones and a deep black are also available.




concrete grey
NCS: S 5005-Y20R

144-059 2,5 mm



light grey
NCS: S 7500-N

144-083 2,5 mm



glaring red
NCS: S 2070-Y90R

144-015 2,5 mm




apricot
NCS: S 2050-Y40R

144-075 2,5 mm




lemon yellow
NCS: S 1060-Y

144-001 2,5 mm




mid grey
NCS: S 8000-N

144-085 2,5 mm



blue turquoise
NCS: S 4040-B70G

144-023 2,5 mm




organic green
NCS: S 3050-G20Y

144-032 2,5 mm




lime green
NCS: S 2050-G40Y

144-030 2,5 mm




black
NCS: S 8500-N

144-080 2,5 mm




clear blue
NCS: S 5030-P80B

144-025 2,5 mm



olympic blue
NCS: S 3050-B10G

144-022 2,5 mm

































aqua turquoise
NCS: S 3030-B10G

144-020 2,5 mm

Marmorette LPX / Marmorette PUR

The classic structure Marmorette is strengthened by new powerful colours: lush green, trendy violet and a rich blue.
The palette of grey and brown tones has also been expanded. All together 51 colours in 2.0 mm 2.5 mm or 3.2 mm thickness. All colours are available with LPX and PUR coating.

	spicy orange NCS: S 3050-Y40R	121-073 2,5 mm 125-073 2,5 mm		melon orange NCS: S 2050-Y30R	121-173 2,5 mm 125-173 2,5 mm		golden yellow NCS: S 1050-Y20R	121-072 2,5 / 3,2 mm 125-072 2,5 mm		pale yellow NCS: S 2040-Y10R	121-076 2,5 mm 125-076 2,5 mm		papaya orange NCS: S 1080-Y20R	121-172 2,5 mm 125-172 2,5 mm
	terracotta NCS: S 3050-Y60R	121-119 2,5 mm 125-119 2,5 mm		rusty orange NCS: S 3050-Y60R	121-115 2,5 mm 125-115 2,5 mm		sunset orange NCS: S 2050-Y60R	121-019 2,5 / 3,2 mm 125-019 2,5 mm		light aurora NCS: S 2030-Y50R	121-075 2,5 mm 125-075 2,5 mm		physalis orange NCS: S 2050-Y60R	121-174 2,5 mm 125-174 2,5 mm
	chili red NCS: S 1580-Y80R	121-118 2,5 mm 125-118 2,5 mm		lobster red NCS: S 4050-Y90R	121-018 2,5 mm 125-018 2,5 mm		cranberry red NCS: S 2080-Y90R	121-048 2,5 mm 125-048 2,5 mm		chestnut NCS: S 3040-Y90R	121-008 2,5 mm 125-008 2,5 mm		mandarin orange NCS: S 2075-Y60R	121-117 2,5 mm 125-117 2,5 mm
	dark blue NCS: S 7020-R80B	121-149 2,5 mm 125-149 2,5 mm		violet NCS: S 5050-R60B	121-128 2,5 mm 125-128 2,5 mm		ink blue NCS: S 5040-R80B	121-148 2,5 mm 125-148 2,5 mm		royal blue NCS: S 4040-R80B	121-049 2,5 / 3,2 mm 125-049 2,5 mm		dusty blue NCS: S 4020-R90B	121-023 2,0/2,5/3,2 mm 125-023 2,5 mm
	sky blue NCS: S 4030-R90B	121-026 2,5 / 3,2 mm 125-026 2,5 mm		autumn blue NCS: S 5020-R90B	121-022 2,5 / 3,2 mm 125-022 2,5 mm		grey turquoise NCS: S 4020-B50G	121-099 2,5 mm 125-099 2,5 mm		leaf green NCS: S 4020-G10Y	121-043 2,5 mm 125-043 2,5 mm		mild green NCS: S 3020-G10Y	125-020 2,5 mm 121-020 2,5 mm
	curacao petrol NCS: S 4050-B40G	121-129 2,5 mm 125-129 2,5 mm		avocado green NCS: S 6030-G30Y	121-041 2,5 mm 125-041 2,5 mm		frog green NCS: S 3030-G30Y	121-100 2,5 mm 125-100 2,5 mm		antique green NCS: S 3030-B50G	121-130 2,5 mm 125-130 2,5 mm		lime green NCS: S 2060-G60Y	121-132 2,5 mm 125-132 2,5 mm



desert beige
NCS: S 2020-Y30R

121-098 2,0/2,5/3,2 mm
125-098 2,5 mm



leather brown
NCS: S 4030-Y30R

121-140 2,0/2,5/3,2 mm
125-140 2,5 mm




rocky brown
NCS: S 2030-Y30R

121-070 2,0/2,5/3,2 mm
125-070 2,5 mm



light sahara
NCS: S 2020-Y20R

121-040 2,0/2,5/3,2 mm
125-040 2,5 mm



banana white
NCS: S 1510-Y20R

121-145 2,5 mm
125-145 2,5 mm



sand beige
NCS: S 2010-Y10R

121-045 2,0 / 2,5 mm
125-045 2,5 mm



mokka brown
NCS: S 8010-Y30R

121-108 2,5 mm
125-108 2,5 mm



dark brown
NCS: S 5010-Y70R

121-003 2,5 mm
125-003 2,5 mm



beeswax beige
NCS: S 3010-Y30R

121-146 2,5 mm
125-146 2,5 mm



smoked pearl
NCS: S 2502-R

121-155 2,5 mm
125-155 2,5 mm



foggy blue
NCS: S 4502-R

121-056 2,0/2,5/3,2 mm
125-056 2,5 mm



carbon grey
NCS: S 8502-Y

121-180 2,5 / 3,2 mm
125-180 2,5 mm



tabac grey
NCS: S 6502-Y

121-158 2,5 / 3,2 mm
125-158 2,5 mm



alumino grey
NCS: S 6500-N

121-159 2,5 / 3,2 mm
125-159 2,5 mm



ice grey
NCS: S 4502-B

121-053 2,0/2,5/3,2 mm
125-053 2,5 mm



flint grey
NCS: 3000-N

121-052 2,5 mm
125-052 2,5 mm



midnight grey
NCS: S 8000-N

121-096 2,5 mm
125-096 2,5 mm




plumb grey
NCS: S 7502-B

121-059 2,0/2,5/3,2 mm
125-059 2,5 mm



industrial grey
NCS: S 8000-N

121-160 2,0/2,5/3,2 mm
125-160 2,5 mm



quartz grey
NCS: S 5502-B

121-050 2,0/2,5/3,2 mm
125-050 2,5 mm



ash grey
NCS: S 4005-R80B

121-055 2,0/2,5/3,2 mm
125-055 2,5 mm

Metallic effects

The effects of the new Lino Art Collection will surprise and inspire you. Their black, grey and brown shades in different colour series give a totally new interpretation of linoleum: by patterns with real metal chips such as aluminium. The result is unique light reflections in shimmering elegance which only DLW Flooring offers. Perfect vintage, retro and metallic looks for luxurious objects and extravagant surface designs.

Imagine a world with linoleum



A world dictated by aesthetics and style: Colorette kumquat orange

Lino Art Metallic LPX

With their aluminium flakes, Lino Art Alumino and Lino Art Firmament give any floor a touch of shimmering elegance. With scattered flakes of real metal, they are sophisticated and truly unique. The large flakes scattered throughout the deep black linoleum in Lino Art Firmament give it the appearance of a clear night sky. The three looks of Lino Art Bronze represent different interpretations of the timeless beauty of bronze and brass, bringing a vintage look to your floor.



Alumino light grey
NCS: S 7500-N

172-083

2,5 mm



Alumino mid grey
NCS: S 8000-N

172-085

2,5 mm



Firmament black
NCS: S 8500-N

152-080

2,5 mm



Firmament black
NCS: S 8500-N

152-080

2,5 mm



Bronze olive brown
NCS: S 8005-Y20R

212-066 2,5 mm



Bronze warm brown
NCS: S 8010-Y70R

212-060 2,5 mm



Bronze cool brown
NCS: S 8005-Y80R

212-069 2,5 mm



Bronze cool brown
NCS: S 8005-Y80R

212-069

2,5 mm

Classic revival

Frederick Walton registered his patent for linoleum in 1863. Since then it has enjoyed world-wide success: qualitatively thanks to its durability, robustness and in design by timelessly attractive patterns. With colours inspired by the classics like the newly released, patented first linoleum “Spanish Brown”, DLW Flooring is celebrating the 150th anniversary of the material. DLW Flooring fills linoleum with life – and makes it look more contemporary than ever.


Imagine a world with linoleum



A world inspired by classics: Lino Art Star lime green

A highlight of the collection, especially for architects and Bauhaus fans everywhere, is the new Uni Walton. Fitting for linoleum's 150th birthday, DLW Flooring has developed six new colours for this monochrome structure: two warm grey tones, a camel brown, a beige, a refined racing green and a dark coffee brown, called "Spanish brown". These reflect the look of linoleum 150 years ago.

The Le Corbusier-based colours are updated classics from the old DLW repertoire, in time for the Bauhaus year and the 150th anniversary of Henry Van de Velde's birth. With its minimal design, Uni Walton results in a surface that is peaceful and calming. The darker colours in particular have a classical elegance well-suited to purist interior design.

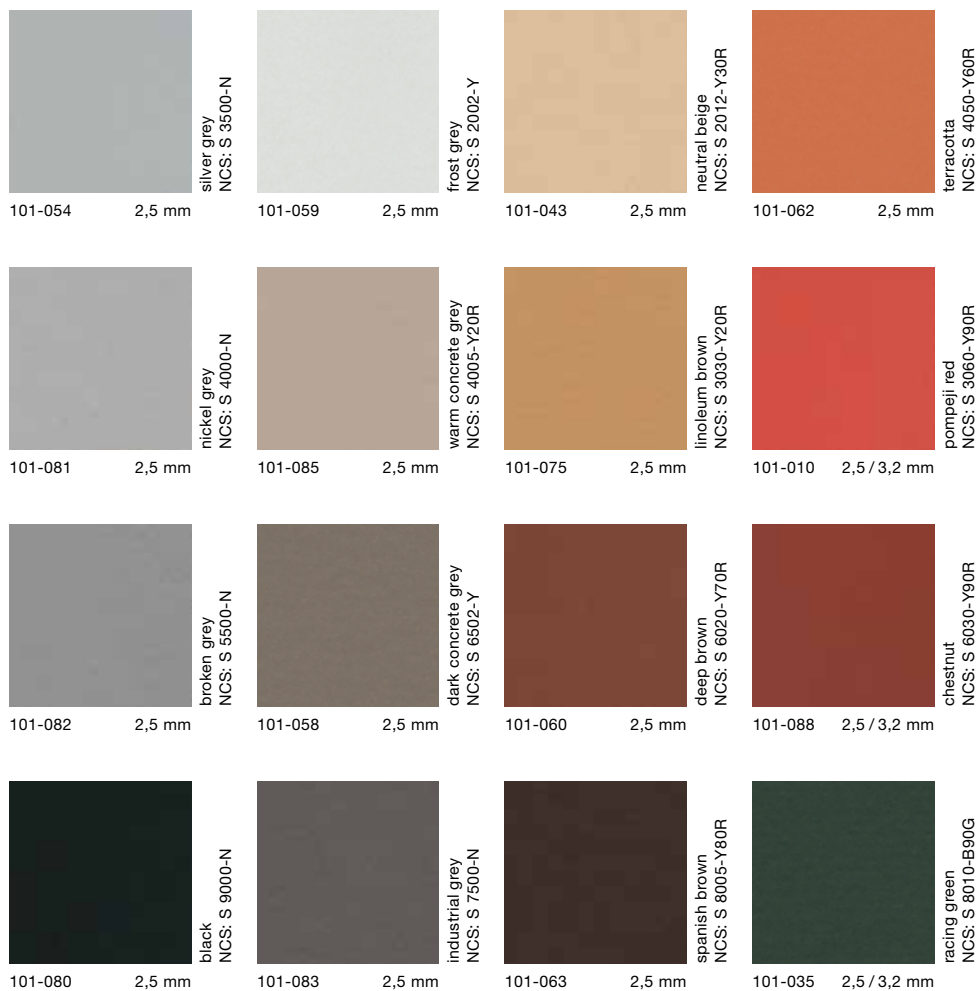

Patented - reliable - Linoleum more than 150 years.
Newly released: **Original „Spanish Brown“**



product
design award

2014 ■



Sir Frederick Walton



spanish brown
NCS: S 8005-Y80R


101-063

2,5 mm

Inspired by nature

With Lino Art Nature DLW presents its directional linoleum structure which is inspired by natural materials such as wood and concrete. It enriches the total collection with natural grey, beige and brown shades. Its structure and colour highlight the natural character of linoleum and provide a homely atmosphere.


Imagine a world with linoleum

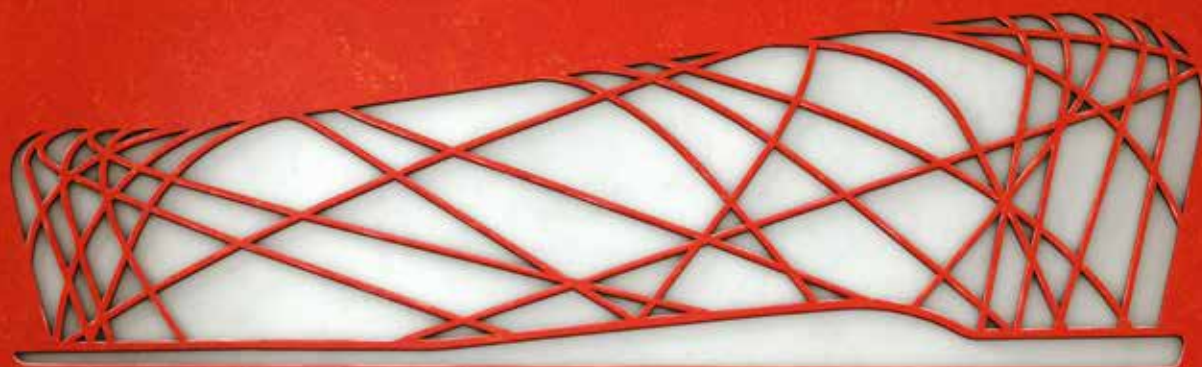

A world at one with nature: Marmorette chilli red


Linorette PUR

The new Linorette, heavily reminiscent of minerals and geologic patterns, presents itself in nine heavily marbled colours. Its structure made of five deliberately contrasting colours blends into a single tone when viewed from a distance.

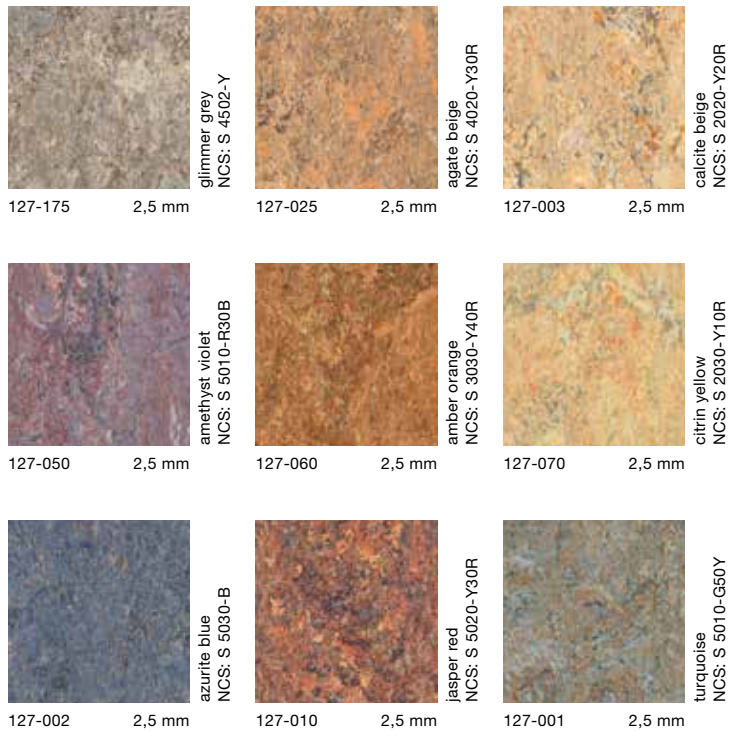
















Granette PUR

Granette also makes a strong appearance, interpreting granite and stone with its distinctive directional structure. Its nine different looks, ranging from grey into the black spectrum, have a cooling, aesthetic effect.

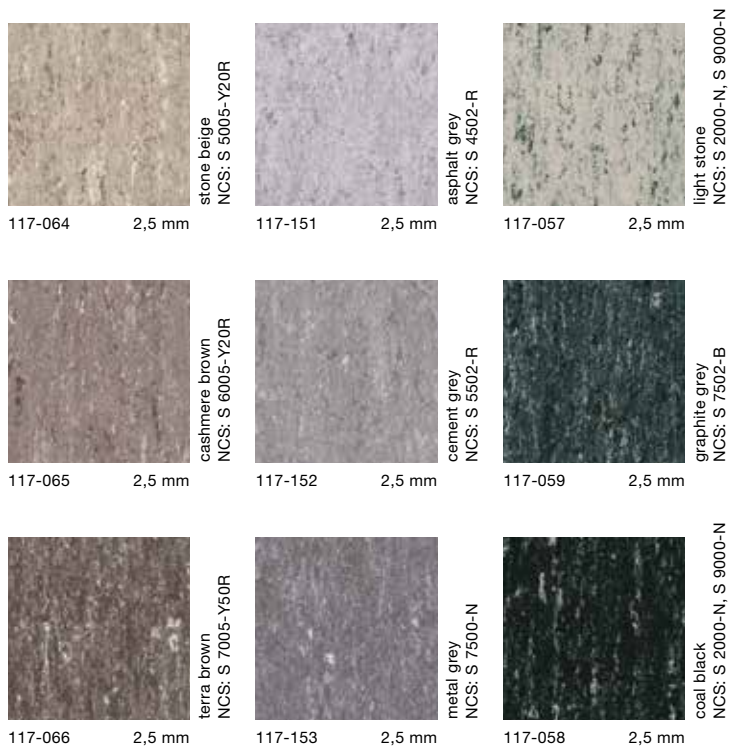

Lino Art Nature LPX

Lino Art Nature emphasises with its structure and colouration the natural character of linoleum, interpreting wood and concrete in their own, individual ways and creating a comfortable ambiance.




Linoleum Special Floorcoverings


Acoustic LPX

Colorette is now also available as Colorette AcousticPlus, a reduced impact noise variant. With a special 1.5 mm thick foam backing, it reduces impact noise by 17 dB. Colorette AcousticPlus is also especially warm to the touch, thanks to the insulating properties of foam. DLW Flooring's solutions are a cost-effective compliment to noise-reducing concrete floors and floating screeds.


Colorette AcousticPlus

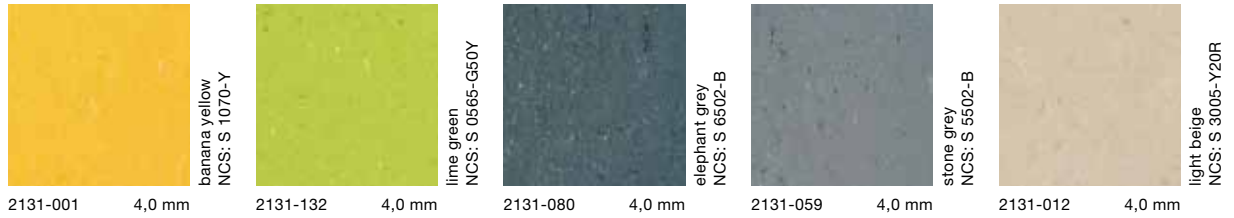

Marmorette AcousticPlus

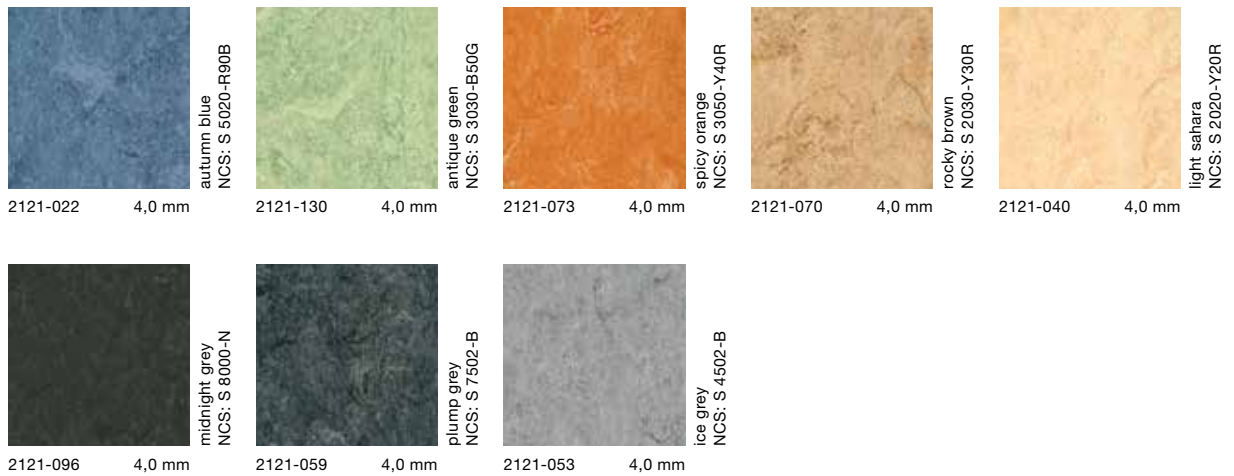


Marmorette Acoustic

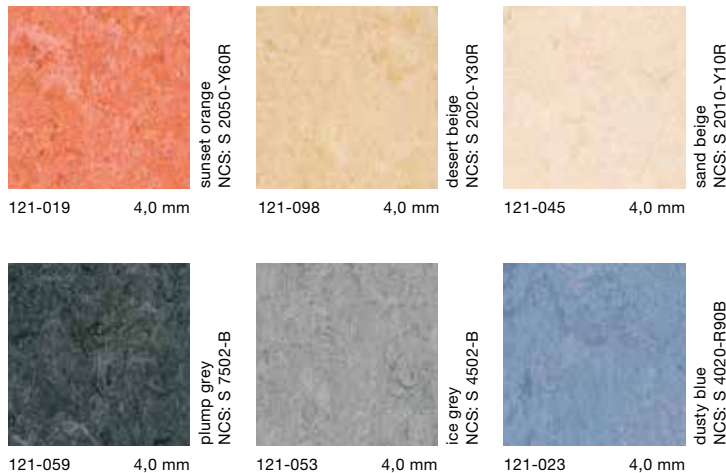

Linodur LPX


Linodur is the heavyweight of linoleum flooring. With a total thickness of 4.00 mm, it is especially robust and strong. It is classified as usage class 43, making it well-suited for production and storage areas. The collection now includes a deep, almost monochrome black as well as a grey tone.

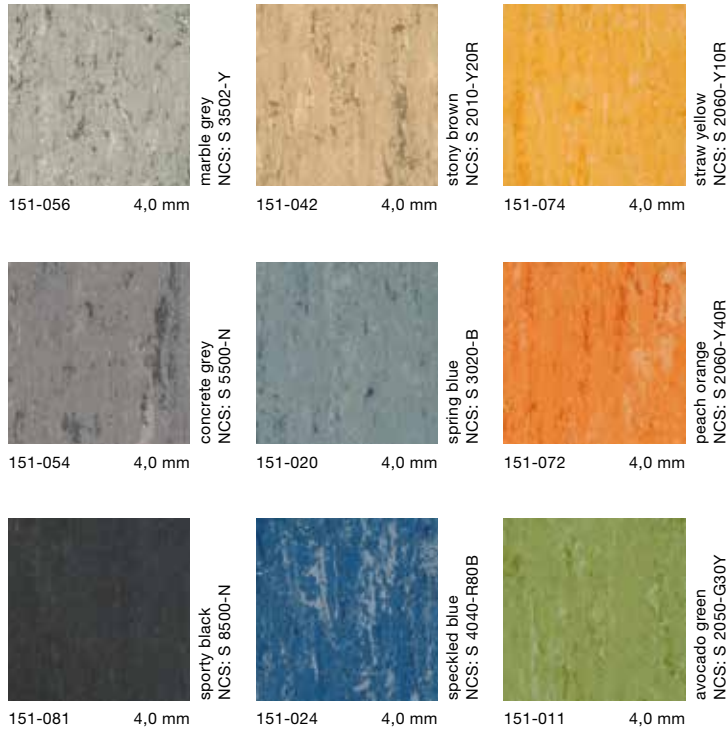


Linodur LCH LPX / Marmorette LCH LPX

Especially designed for rooms where the maximum electrical resistance to earth of 1 x 10 cube 8 ohms is fulfilled by the installation of conductive linoleum LCH. The qualities: Marmorette LCH as sheet material in 2.5 and 3.2 mm width and Linodur LCH in 4 mm width, both with LPX Finish. Linoleum LCH also fulfils the requirements for local transfer resistance in accordance with VDE 0100.

Linodur LCH

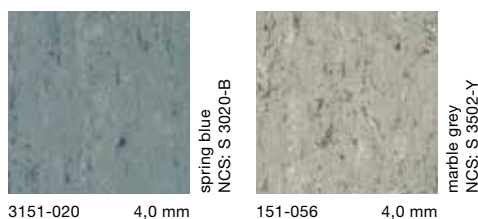

Marmorette LCH

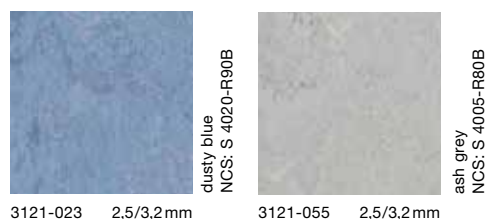

DLW LINOLEUM

Technical Data

Specification according to EN 548 / EN ISO 24011 / EN 686 / EN 687

Characteristics	Standard	Marmorette	Colorette Lino Art Nature Lino Art Metallic Lino Art Star Marmorette Uni Walton	Colorette Granette Linorette Marmorette
Surface protection		LPX	LPX	PUR Eco System
Overall Thickness	EN 428 / EN ISO 24346	2,0 mm	2,5 mm	2,5 mm
Total weight	EN 430 / EN ISO 23997	2400 g/m ²	2900 g/m ²	2900 g/m ²
Sheet width	EN 426 / EN ISO 24341	200 cm	200 cm	200 cm
Roll length	EN 426 / EN ISO 24341	20 - 31 m	20 - 31 m	20 - 31 m
Classification	EN 685 / EN ISO 10874	23 / 32 / 41	23 / 34 / 42	23 / 34 / 42
Thickness of cork / foam backing	EN 429 / EN ISO 24340			
Backing	Jute fabric	Jute fabric	Jute fabric	Jute fabric
Safety criteria				
Flammability	EN 13501-1	C _{fl} - s1*	C _{fl} - s1*	C _{fl} - s1*
Slip resistance	BGR 181	R 9	R 9	R 9
Impact Sound reduction	ISO 140-8	3 dB	4 dB	4 dB
Residual indentation	EN 433 / EN ISO 24343	≤ 0,15 mm	≤ 0,15 mm	≤ 0,15 mm
Vertical resistance R ₁	EN 1081	-	-	-
Thermal resistance	EN 12667	0,012 m ² K / W	0,015 m ² K / W	0,015 m ² K / W
Thermal conductivity	EN 12524	0,17 W / m K	0,17 W / m K	0,17 W / m K

Please note before selecting your colour:

Depending on exposure to light, the colour can vary due to linoleums natural oxidisation process known as veiling.



Z-156.604-376
Z-156.604-331
Z-156.604-105
Z-156.604-769
Z-158.10-60

Emissionsgeprüfter Bodenbelag nach
DIBt-Grundsätzen



EN 14041: 2004
1658-DOP-101
1658-DOP-102
1658-DOP-103
1658-DOP-104
1658-DOP-105

Manufactured by:

DLW Flooring GmbH
Ludwig-Kaufmann-Str.15
D-27753 Delmenhorst

Percentage of raw material

Linoleum LPX/PUR: 73% organic; 27% mineral or
LCH: 79% organic; 21% mineral

DLW Linoleum contains no PVC or plasticizer.

Antibacterial activity according to JIS Z 2801:

DLW Linoleum has an antibacterial activity

REACH: contains no substances mentioned in the SVHC-list

DLW Flooring reserves the right to amend specification and cleaning and maintenance guidelines without prior notice.
For the latest versions please check our internet site www.dlw.eu.

* adhered according to certificate, see www.dlw.eu.

Colorette Marmorette Uni Walton	Linodur	Marmorette LCH	Linodur LCH	Colorette AcousticPlus	
				Marmorette AcousticPlus	Marmorette Acoustic
LPX	LPX	LPX	LPX	LPX	LPX
3,2 mm	4,0 mm	2,5 + 3,2 mm	4,0 mm	4,0 mm	4,0 mm
3800 g/m ²	4700 g/m ²	3000 / 3900 g/m ²	4900 g/m ²	3500 g/m ²	3900 g/m ²
200 cm	200 cm	200 cm	200 cm	200 cm	200 cm
20 - 31 m	20 - 31 m	20 - 31 m	20 - 31 m	20 - 31 m	20 - 31 m
23 / 34 / 42	23 / 34 / 43	23 / 34 / 42	23 / 34 / 43	23 / 33 / 41	23 / 33 / 41
				1,5 mm	2,0 mm
Jute fabric	Jute fabric	Jute fabric	Jute fabric	foam backing	cork
C _{fl} - s1*	C _{fl} - s1*	C _{fl} - s1*	C _{fl} - s1*	C _{fl} - s1*	C _{fl} - s1*
R 9	R 9	R 9	R 9	R 9	R 9
6 dB	6 dB	3 / 5 dB	6 dB	17 dB	14 dB
≤ 0,15 mm	≤ 0,20 mm	≤ 0,15 mm	≤ 0,20 mm	≤ 0,30 mm	≤ 0,40 mm
-	-	≤ 1 x 10 ⁸ Ohm	≤ 1 x 10 ⁸ Ohm	-	-
0,018 m ² K / W	0,023 m ² K / W	0,015 / 0,018 m ² K / W	0,023 m ² K / W	0,044 m ² K / W	0,040 m ² K / W
0,17 W / m K	0,17 W / m K	0,17 W / m K	0,17 W / m K	0,0937 W / m K	0,17 W / m K

Surface treatments overview

Belag	2,0 mm	2,5 mm	3,2 mm	4,0 mm
Colorette		LPX + PUR	LPX	
Lino Art Star		LPX		
Marmorette	LPX	LPX + PUR	LPX	
Lino Art Metallic		LPX		
Uni Walton		LPX	LPX	
Linorette		PUR		
Granette		PUR		
Lino Art Nature		LPX		
Colorette AcousticPlus				LPX
Marmorette AcousticPlus				LPX
Marmorette Acoustic				LPX
Linodur				LPX
Linodur LCH				LPX
Marmorette LCH		LPX	LPX	

Change of surface:

A different surface protection is possible from a minimum quantity of 600 m² per colour. This production runs a trailer production with standard material produced for our stock. Please note that this results in longer delivery times. For standard delivery time, a minimum quantity of 3,000 m² is necessary.

Special colors:

We offer customized products based on customer's demand as a special service. This normally involves making special colours to order, although technical modifications or changes in product dimensions may also be required. The minimum quantity per special colour is generally 3,000m².

Wall connecting sections:

We offer HSLA wall connection as well as suitable profiles. Please visit www.dlw.eu



FLOORING

DLW Flooring GmbH

Headquarter
Bietigheim-Bissingen
Stuttgarter Straße 75
D-74321 Bietigheim-Bissingen
Tel. +49 (0) 71 42 71-0
Fax +49 (0) 71 42 71-799
service_germany@armstrong.com
www.dlw.eu

www.dlw.eu